


Nickel-Plated BS Chains

Ideal for outdoor operations and in situations where machinery and equipment must be run in a lightly corrosive atmosphere or where good chain appearance may be desired. All components are plated before assembly to ensure complete protection of all parts.

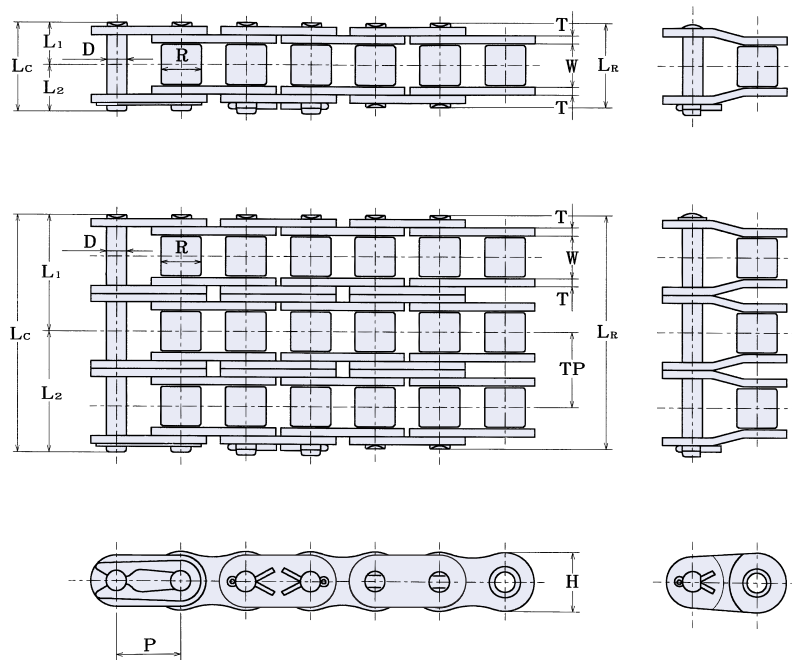

NP BS STANDARD

SY Chain No.	Dimensions - mm												Minimum Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate		Trans. Pitch					
		Width	Dia.	Dia.	Length			Height	Thickness						
P	W	R	D	LR	LC	L1	L2	H	T1	T2	TP	kN	kN	kg/m	
06B-NP	9.525	5.72	6.35	3.28	12.6	13.4	6.3	7.1	8.2	1.0	1.25	10.24	8.92	1.77	0.43
08B-NP	12.70	7.75	8.51	4.45	16.7	18.0	8.4	9.6	11.8	1.5	1.5	13.92	17.8	3.14	0.61
10B-NP	15.875	9.65	10.16	5.08	19.0	20.7	9.5	11.2	14.7	1.65	1.65	16.59	22.2	4.90	0.89
12B-NP	19.05	11.68	12.07	5.72	22.0	23.6	11.0	12.6	16.1	1.8	1.8	19.46	28.9	7.06	1.14
16B-NP	25.40	17.02	15.88	8.26	35.1	38.2	17.6	20.5	20.6	3.2	4.0	31.88	60	12.6	2.59
20B-NP	31.75	19.56	19.05	10.16	40.2	44.0	20.1	23.9	26.4	3.5	4.5	36.45	95	19.6	3.76
06B-NP-2	9.525	5.72	6.35	3.28	22.9	23.7	11.5	12.2	8.2	1.0	1.25	10.24	16.9	3.00	0.81
08B-NP-2	12.70	7.75	8.51	4.45	30.6	31.9	15.3	16.6	11.8	1.5	1.5	13.92	31.1	5.35	1.26
10B-NP-2	15.875	9.65	10.16	5.08	35.6	37.3	17.8	19.5	14.7	1.65	1.65	16.59	44.5	8.33	1.79
12B-NP-2	19.05	11.68	12.07	5.72	41.6	43.1	20.8	22.3	16.1	1.8	1.8	19.46	57.8	12.0	2.28
16B-NP-2	25.40	17.02	15.88	8.26	67.2	70.1	33.6	36.5	20.6	3.2	4.0	31.88	106	21.4	5.13
20B-NP-2	31.75	19.56	19.05	10.16	76.8	80.6	38.4	42.2	26.4	3.5	4.5	36.45	170	33.3	7.26

Refer to page 80. " Selection of offset link "