


# Sintered Steel Bushing SL Double Pitch Roller Chains

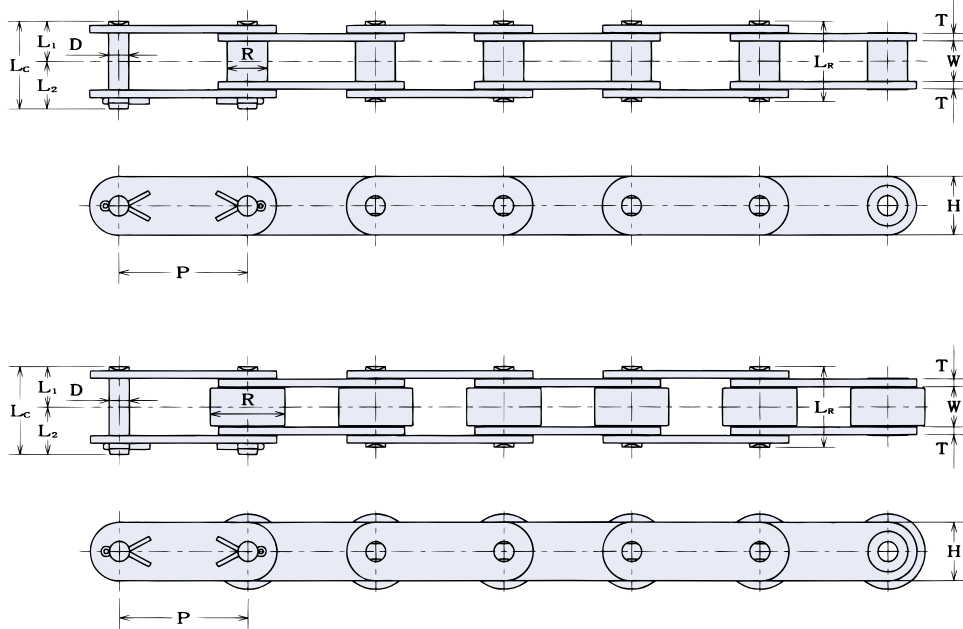

## CONVEYOR SERIES (ROLLERLESS-BUSHED TYPE)

SY Chain No.	Dimensions - mm										Average Ultimate Strength kN	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch P	Roller		Pin				Plate					
		Width W	Dia. R	Dia. D	Length			Height H	Thick. T				
				LR	LC	L1	L2						
C 2040-SL	25.40	7.95	7.92	3.96	16.5	17.9	8.3	9.6	12.0	1.5	12.7	2.94	0.48
C 2050-SL	31.75	9.53	10.16	5.08	20.4	22.0	10.2	11.8	15.0	2.0	19.6	4.90	0.82
C 2060-SL	38.10	12.70	11.91	5.95	25.5	26.9	12.8	14.1	18.1	2.4	28.4	6.86	1.20
C 2080-SL	50.80	15.88	15.88	7.93	32.8	35.0	16.4	18.6	24.1	3.2	51.0	11.8	1.99

## CONVEYOR SERIES (CARRIER ROLLER TYPE)

SY Chain No.	Dimensions - mm										Average Ultimate Strength kN	Maximum Allowable Load kN	Average Chain Weight kg/m
	Pitch P	Roller		Pin				Plate					
		Width W	Dia. R	Dia. D	Length			Height H	Thick. T				
				LR	LC	L1	L2						
C 2042-SL	25.40	7.95	15.88	3.96	16.5	17.9	8.3	9.6	12.0	1.5	12.7	2.94	0.82
C 2052-SL	31.75	9.53	19.05	5.08	20.4	22.0	10.2	11.8	15.0	2.0	19.6	4.90	1.26
C 2062-SL	38.10	12.70	22.23	5.95	25.5	26.9	12.8	14.1	18.1	2.4	28.4	6.86	1.78
C 2082-SL	50.80	15.88	28.58	7.93	32.8	35.0	16.4	18.6	24.1	3.2	51.0	11.8	3.03