


Sintered Steel Bushing SLR Double Pitch Roller Chains

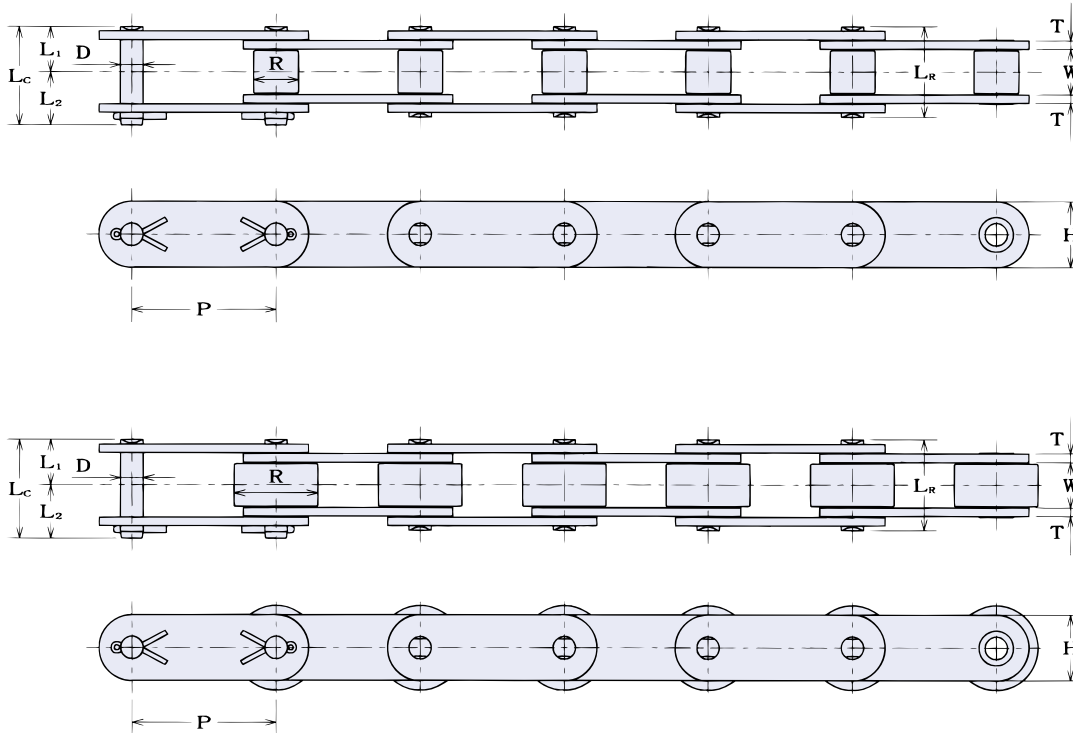

CONVEYOR SERIES (STANDARD ROLLER TYPE)

SY Chain No.	Dimensions - mm										Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia.	Length			Height	Thick.				
		P	W	R	D	LR	LC	L1	L2	H			
C 2040-SLR	25.40	7.95	7.92	3.96	16.5	18.5	8.3	10.2	11.5	1.5	15.7	2.65	0.5
C 2050-SLR	31.75	9.53	10.16	5.08	20.5	22.5	10.3	12.2	15.1	2.0	25.5	4.31	0.8
C 2060H-SLR	38.10	12.70	11.91	5.95	29.1	31.5	14.6	16.9	17.2	3.2	37.3	6.28	1.4
C 2080H-SLR	50.80	15.88	15.88	7.93	35.8	39.0	17.9	21.1	22.8	4.0	63.7	10.7	2.4
C 2100H-SLR	63.50	19.05	19.05	9.53	42.7	46.6	21.4	25.2	28.8	4.8	100	17.1	3.5

CONVEYOR SERIES (CARRIER ROLLER TYPE)

SY Chain No.	Dimensions - mm										Average Ultimate Strength	Maximum Allowable Load	Average Chain Weight
	Pitch	Roller		Pin				Plate					
		Width	Dia.	Dia.	Length			Height	Thick.				
		P	W	R	D	LR	LC	L1	L2	H			
C 2042-SLR	25.40	7.95	15.88	3.96	16.5	18.5	8.3	10.2	11.5	1.5	15.7	2.65	0.82
C 2052-SLR	31.75	9.53	19.05	5.08	20.5	22.5	10.3	12.2	15.1	2.0	25.5	4.31	1.26
C 2062H-SLR	38.10	12.70	22.23	5.95	29.1	31.5	14.6	16.9	17.2	3.2	37.3	6.28	2.08
C 2082H-SLR	50.80	15.88	28.58	7.93	35.8	39.0	17.9	21.1	22.8	4.0	63.7	10.7	3.36
C 2102H-SLR	63.50	19.05	39.67	9.53	42.7	46.6	21.4	25.2	28.8	4.8	100	17.1	5.64